


Unique, engineered lighting :

Multi-directional surface mounting gooseneck lamp incorporating an ultra-bright and energy efficient single 3W super-flux LED light head.

LUMIN GOOSE SF FEATURES :

- * Optional, hand turned sustainable walnut shade.
- * 'Warm' & 'cool' white LED options. Red, green & blue output LEDs available on request.
- * Mains connection transformer.
- * Precision machined and turned, black or silver anodised aluminium fitting.
- * UK made, unique stainless steel bendable 'stayput' tubing.
- * Trailing switched lead option for quick installation.
- * Low power consumption.
- * Maintenance free 100,000 hour LED runtime.
- * Made in England following stringent environmental policies.

LUMIN GOOSE SF ACCESSORIES & DIMENSIONS :

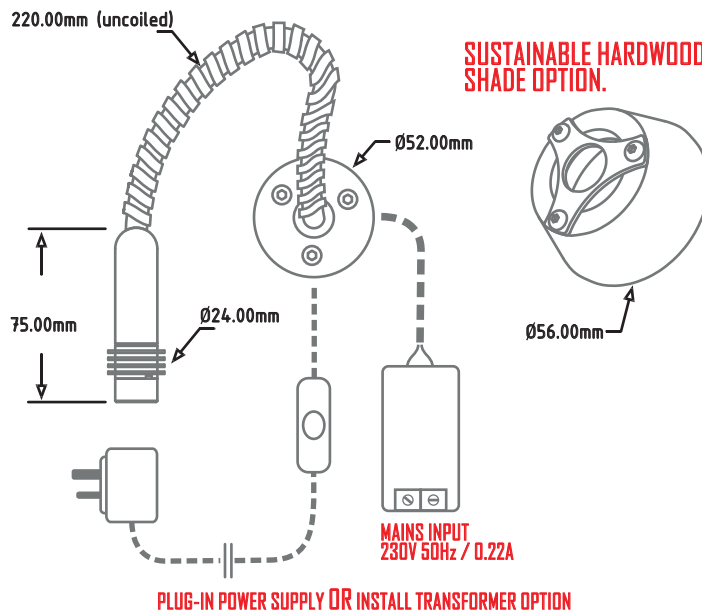

ENERGY EFFICIENT & ULTRA-BRIGHT SUPER-FLUX LED

BLACK OR SILVER ANODISED ALUMINIUM CASING



LUMIN GOOSE SF SPECIFICATIONS :

OPTICAL :

Illumination Type : 3W super-flux 'cool' white or 3W super-flux 'warm' white LED. Other colours available.
Luminous Ratings : 800 Lux @ 0.5m ('cool' white), 900 Lux @ 0.5m ('warm' white). Approximate values

ELECTRICAL :

Power source : Compact mains install transformer or plug-in power supply unit (supplied)
Power consumption : 3W
Runtime : LED rated at 100,000 hours.
Control : Direct connection via transformer to switched mains supply or trailing switched lead to plug-in power supply unit.
Switch rating : 250VAC 3A.
Cable : Resistant polyurethane. Length : 5m.

MECHANICAL

Material : 6063-T6 aluminium alloy (light head and fixing rose); stainless steel (bendable tubing); sustainable walnut (optional shade).
Finish : Aluminum: silver or black anodised to AA25. Stainless steel: natural finish. Hardwood shade: beeswax.
Weight : 0.25Kg.
Environment / IP Rating : Indoor / -